



ME 3900

GoGEN



EN

PROFESSIONAL WEATHER STATION

INSTRUCTION MANUAL

1. INTRODUCTION

Thank you for your purchase of the Wireless WiFi Weather Station. The following user guide provides step by step instructions for installation, operation and troubleshooting.

2. WARNINGS AND CAUTIONS

⚠ Warning: Any metal object may attract a lightning strike, including your weather station mounting pole. Never install the weather station in a storm.

⚠ Warning: Installing your weather station in a high location may result in injury or death. Perform as much of the initial check out and operation on the ground and inside a building or home. Only install the weather station on a clear, dry day.

3. QUICK START GUIDE

Although the manual is comprehensive, much of the information contained may be intuitive. In addition, the manual does not flow properly because the sections are organized by components.

The following Quick Start Guide provides only the necessary steps to install, operate the weather station, and upload to the internet, along with references to the pertinent sections.

Required

Step	Description	Section
1	Assemble and power up the Y shape sensor	5.2.1–5.2.3
2	Power up the display console and synchronize with Y shape sensor	5.4
5	Mount the sensor array	5.2.4
3	Set date and time on console	6.4.5
4	Calibrate the relative pressure to sea-level conditions (local airport) on console	6.7.1
6	Reset the rain to zero on console	6.4.10

Optional

7	Configure WiFi	8.1
8	Register and upload to Weather Server	9

4. PRE-INSTALLATION CHECKOUT AND SITE SURVEY

4.1 PRE-INSTALLATION CHECKOUT

Before installing your weather station in the permanent location, we recommend operating the weather station for one week in a temporary location with easy access. This will allow you to check out all of the functions, ensure proper operation, and familiarize you with the weather station and calibration procedures. This will also allow you to test the wireless range of the weather station.

4.2 SITE SURVEY

Perform a site survey before installing the weather station. Consider the following:


1. You must clean the rain gauge every few months and change the rechargeable batteries every 2-3 years. Provide easy access to the weather station.
2. Avoid radiant heat transfer from buildings and structures. In general, install the sensor array at least 5' from any building, structure, ground, or roof top.
3. Avoid wind and rain obstructions. The rule of thumb is to install the sensor array at least four times the distance of the height of the tallest obstruction. For example, if the building is 6 m tall, and the mounting pole is 2 m tall, install $4 \times (6 - 2) = 16$ m away.
4. Wireless Range. The radio communication between receiver and transmitter in an open field can reach a distance of up to 100 m, providing there are no interfering obstacles such as buildings, trees, vehicles, high voltage lines. Wireless signals will not penetrate metal buildings. Under most conditions, the maximum wireless range is 30 m.
5. Radio interference such as PCs, radios or TV sets can, in the worst case, entirely cut off radio communication. Please take this into consideration when choosing console or mounting locations. Make sure your display console is at least 1,5 m away from any electronic device to avoid interference.

5. SETTING STARTED

5.1 CONTENTS

QTY	Item
1	Display Console
1	Y shape outdoor sensor (Thermo-hygrometer / Rain Gauge / Wind Speed Sensor / Transmitter)
1	Wind Vane
1	5 V DC Adapter
1	U-bolt with mounting clamps
1	User manual
1	Zip bag for 1 pc 10 mm single-head wrench

5.2 SENSOR SET UP

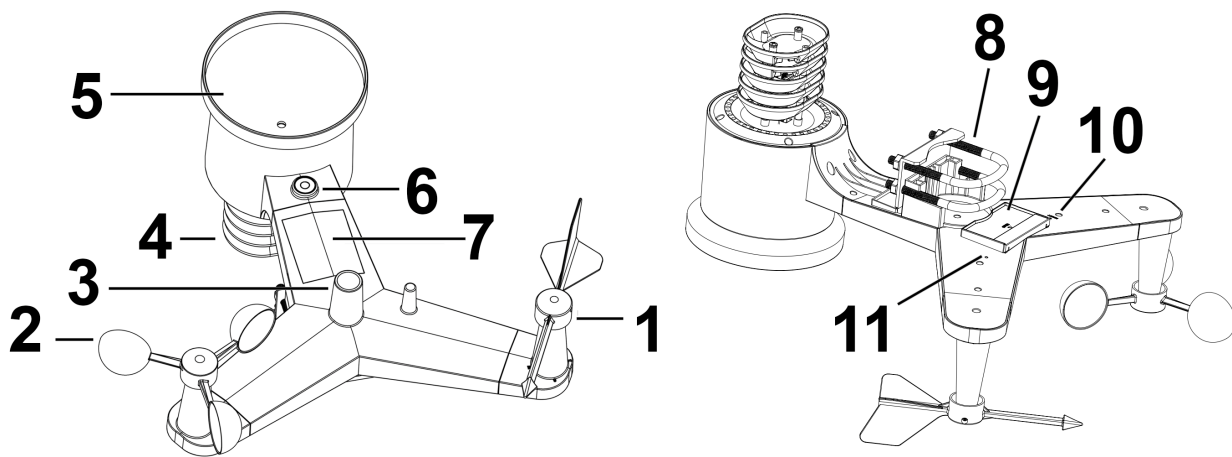

1. Wind Vane
2. Wind Speed Sensor
3. UV sensor/ Light sensor
4. Thermo-hygro sensor
5. Rain collector
6. Bubble level
7. Solar panel
8. U-Bolt
9. Battery compartment
10. Reset button
11. LED Indicator: light on for 4s if the unit power up. Then the LED will flash once every 16 seconds (the sensor transmission update period).

5.2.1. INSTALL U-BOLTS AND MOUNTING POLE

Installation of the U-bolts, which are in turn used to mount the sensor package on a pole, requires installation of an included metal plate to receive the U-bolt ends. The metal plate, visible in Figure 1, has four holes through which the ends of the two U-Bolts will fit.

The plate itself is inserted in a groove on the bottom of the unit (opposite side of solar panel). Note that one side of the plate has a straight edge (which goes into the groove), the other side is bent at a 90-degree angle and has a curved profile (which will end up “hugging” the mounting pole). Once the metal plate is inserted, remove nuts from the U-Bolts and insert both U-bolts through the respective holes of the metal plate as shown in *Figure 1*.

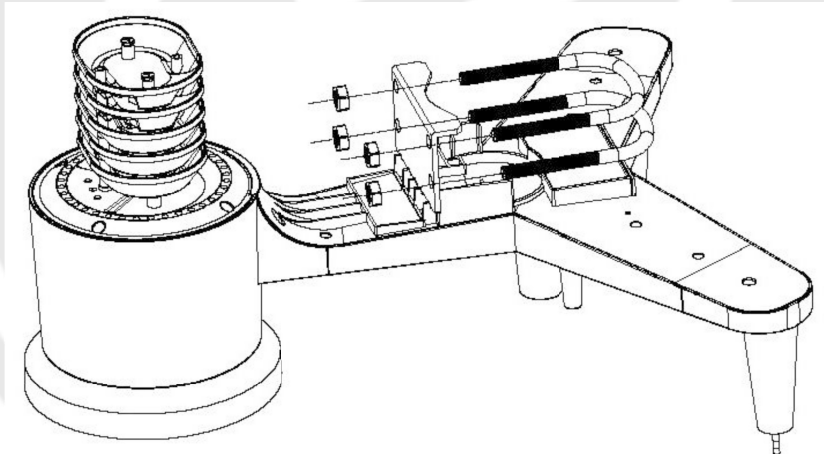


Figure 1

Loosely screw on the nuts on the ends of the U-bolts. You will tighten these later during final mounting. Final assembly is shown in *Figure 2*.

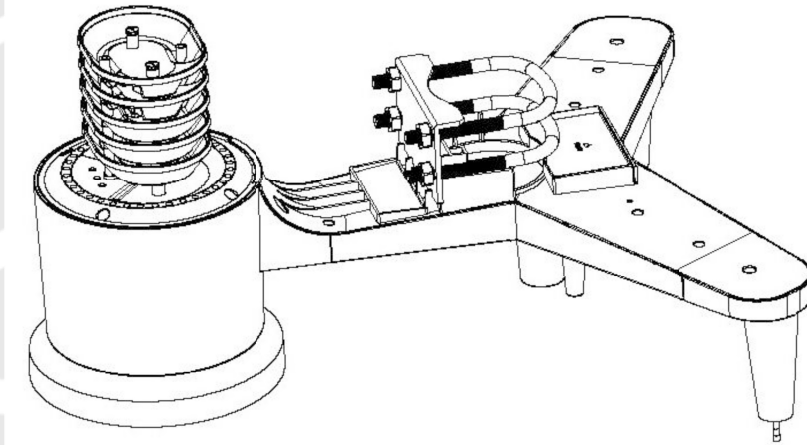


Figure 2

The plate and U-Bolts are not yet needed at this stage but doing this now may help avoid damaging wind vane and wind speed cups later on.

5.2.2. INSTALL WIND VANE

Push the wind vane onto the shaft on the top of the sensor, until it goes further, as shown in *Figure 3*.

Tighten the set screw, with a screwdriver, until the wind vane cannot be removed from the axle, as shown in *Figure 4*. Make sure the wind vane spin freely. The wind vane's movement has a small amount of friction, which is helpful in providing steady wind direction measurements.

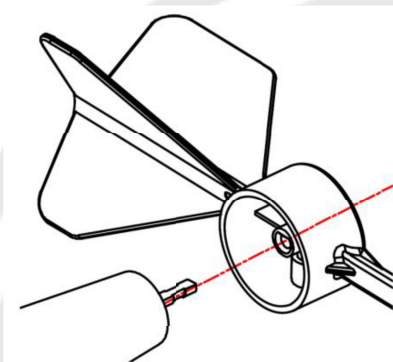


Figure 3

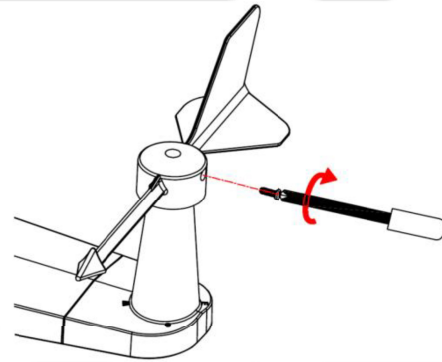


Figure 4

There are four alphabet letters of “N”, “E”, “S” and “W” around the wind direction, representing for the direction of North, East, South and West. Wind direction sensor has to be adjusted so that the directions on the sensor are matching with your real location. Permanent wind direction error will be introduced when the wind direction sensor is not positioned correctly during installation.

5.2.3. INSTALL WIND SPEED

Push the wind speed into the shaft. as shown in *Figure 5*.

Tighten the set screw with as shown in *Figure 6*. Make sure the wind speed spin freely.

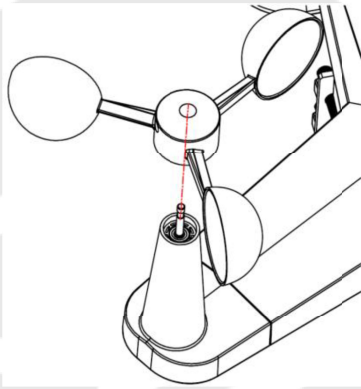


Figure 5

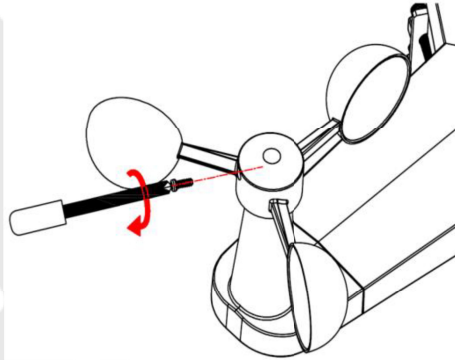


Figure 6

5.2.4. INSTALL BATTERIES

Insert 2XAA batteries in the battery compartment. The LED indicator on the back of the transmitter will turn on for four seconds and normally flash once every 16 seconds (the sensor transmission update period).

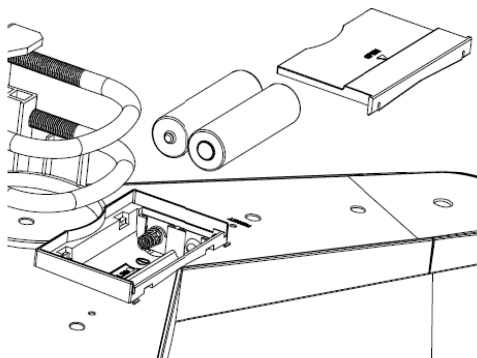


Figure 7

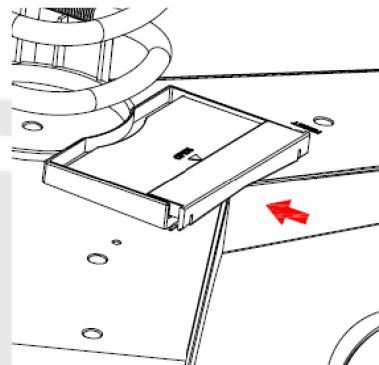


Figure 8

Note: If no LED light up or is lighted permanently, make sure the battery is inserted the correct way or a proper reset is happened. Do not install the batteries backwards. You can permanently damage the outdoor sensor

Note: We recommend lithium batteries for cold weather climates, but alkaline batteries are sufficient for most climates. We do not recommend rechargeable batteries. They have lower voltages, do not operate well at wide temperature ranges, and do not last as long, resulting in poorer reception.

5.2.5. MOUNT ASSEMBLED OUTDOOR SENSOR PACKAGE

5.2.5.1 BEFORE YOU MOUNT

Before proceeding with the outdoor mounting detailed in this section, you may want to skip to setup instructions in section 6.2. Initial Display Console Set Up and onwards first, while you keep the assembled outdoor sensor package nearby (although preferably not closer than 1,5 m from the console). This will make any troubleshooting and adjustments easier and avoids any distance or interference related issues from the setup.

After setup is complete and everything is working, return here for outdoor mounting. If issues show up after outdoor mounting they are almost certainly related to distance, obstacles etc.

5.2.5.2 MOUNTING

You can attach a pipe to a permanent structure and then attach the sensor package to it (see *Figure 9*). The U-Bolts will accommodate a pipe diameter of 2,5 - 5 cm (pipe not included).

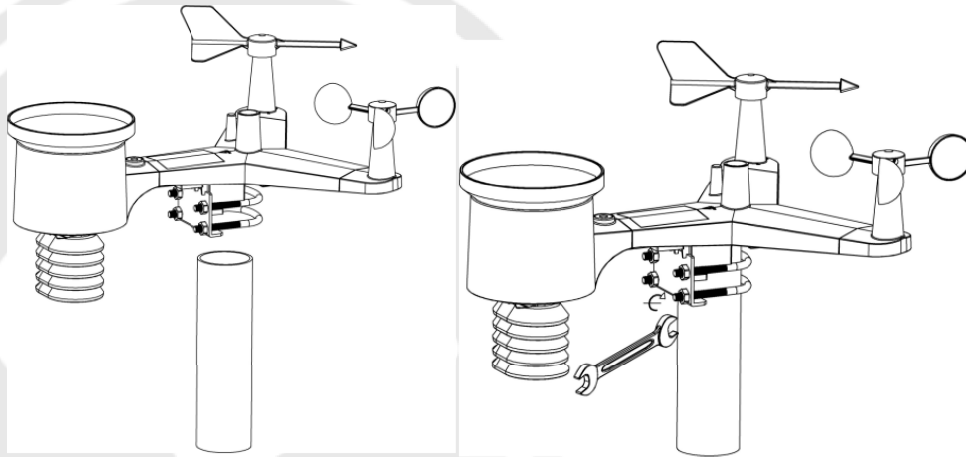


Figure 9

Finally, place the sensor package on top of the prepared mounting pipe. The U-Bolts should be loose enough to allow this but loosen the nuts as necessary. Once placed, hand tightens all four nuts, taking care to do so evenly.

Now you will need to align the whole package in the proper direction by rotating it on top of the mounting pipe as needed. Locate the arrow labeled “North” that you will find on top of the sensor package right next to the light sensor. You must rotate the whole sensor package until this arrow points due north. To achieve proper alignment, it is helpful to use a compass (many cell phones have a compass application). Once rotated in the correct orientation, lightly tighten the bolts a little more (use a wrench) to prevent further rotation.

Note: Use the bubble level next to the rain sensor to make sure sensor array is completely level. If the sensor is not level, the rain gauge, UV and solar radiation sensors will not measure properly.

5.2.6 RESET BUTTON AND TRANSMITTER LED

In the event the sensor array is not transmitting, reset the sensor array.

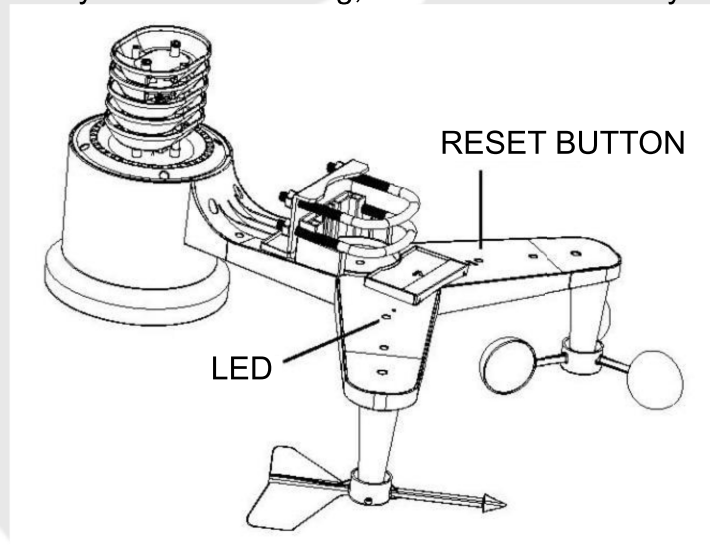


Figure 10

With an open-ended paperclip, press and hold the RESET BUTTON for three seconds to completely discharge the voltage.

5.3 BEST PRACTICES FOR WIRELESS COMMUNICATION

Note: To ensure proper communication, mount the remote sensor(s) upright on a vertical surface, such as a wall. Do not lay the sensor flat.

Wireless communication is susceptible to interference, distance, walls and metal barriers. We recommend the following best practices for trouble free wireless communication.

Electro-Magnetic Interference (EMI). Keep the console several meters away from computer monitors and TVs.

Radio Frequency Interference (RFI). If you have other 868 MHz devices and communication is intermittent, try turning off these other devices for troubleshooting purposes. You may need to relocate the transmitters or receivers to avoid intermittent communication.

1. Line of Sight Rating. This device is rated at 100 m line of sight (no interference, barriers or walls) but typically you will get 30 m maximum under most real-world installations, which include passing through barriers or walls.
2. Metal Barriers. Radio frequency will not pass through metal barriers such as aluminum siding. If you have metal siding, align the remote and console through a window to get a clear line of sight.

The following is a table of reception loss vs. the transmission medium. Each “wall” or obstruction decreases the transmission range by the factor shown below.

Medium	RF Signal Strength Reduction
Glass (untreated)	5-15%
Plastics	10-15%
Wood	10-40%
Brick	10-40%
Concrete	40-80%
Metal	90-100%

5.4 DISPLAY CONSOLE

Insert the 5V AC adaptor into the back of the display console.

Note: Place the outdoor sensor array about 1,5 to 3 m from the display console and wait several minutes for the remote sensors to synchronize with the display console.

Insert 3 AAA batteries into the display console. Please insert the battery as blew *Figure 11*:

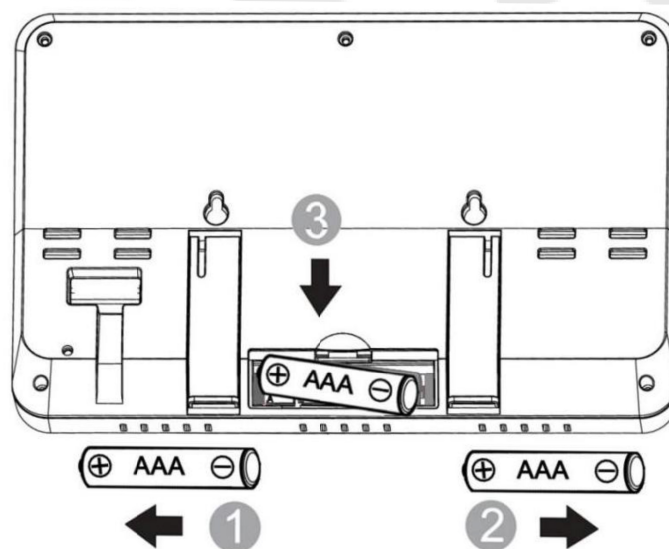


Figure 11

Note: The batteries are intended for back-up power only. The backlight will remain on for 5 seconds when on back up battery power only. Only when you use power adapter it will the backlight be continuously on.

Keep both sensor and the display console together for 15 minutes to lock in the sensor signals. Spin the wind cups to simulate wind speed. Take the sensor to the sink and slowly drip water into the rain bucket to simulate rain.

After 15 minutes, follow the mounting instructions for proper placement of sensors.

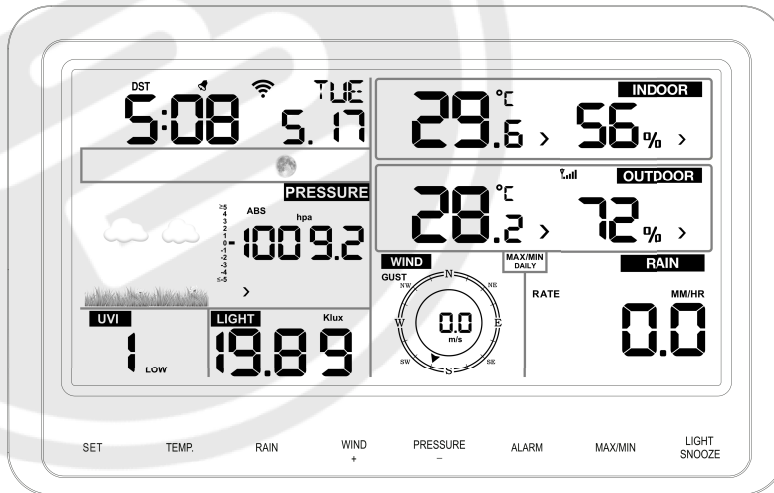


Figure 12

Note: Your display console should have readings in all sections. Wind and Rain will show 0's (connected) until wind or rain occur or are simulated.

Note: If you only use battery to power up display console, you must press LIGHT/SNOOZE key to light up the LCD before press any other key.

5.4.1 VERTICAL DESK STAND

The console is best viewed above from a 20 to 30 degrees angle.

In addition to the fold out desk stand on the back of the display, console, the console also includes a vertical desk stand to improve the viewing angle on a desk, as shown in Figure 13.


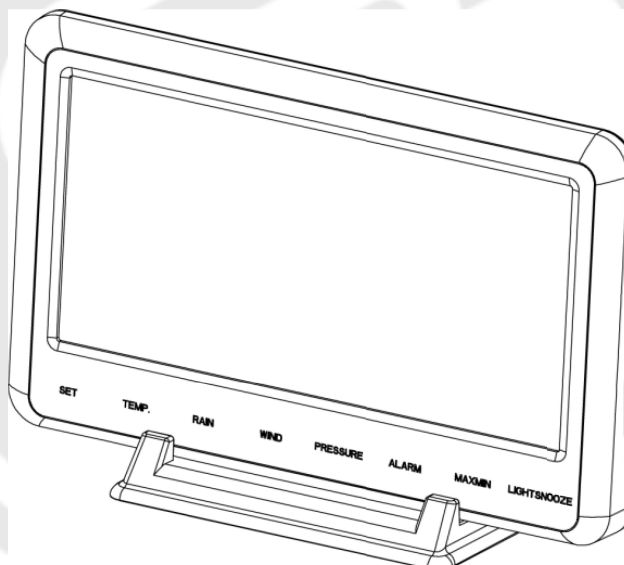


Figure 13

6. DISPLAY CONSOLE OPERATION

6.1. SCREEN DISPLAY

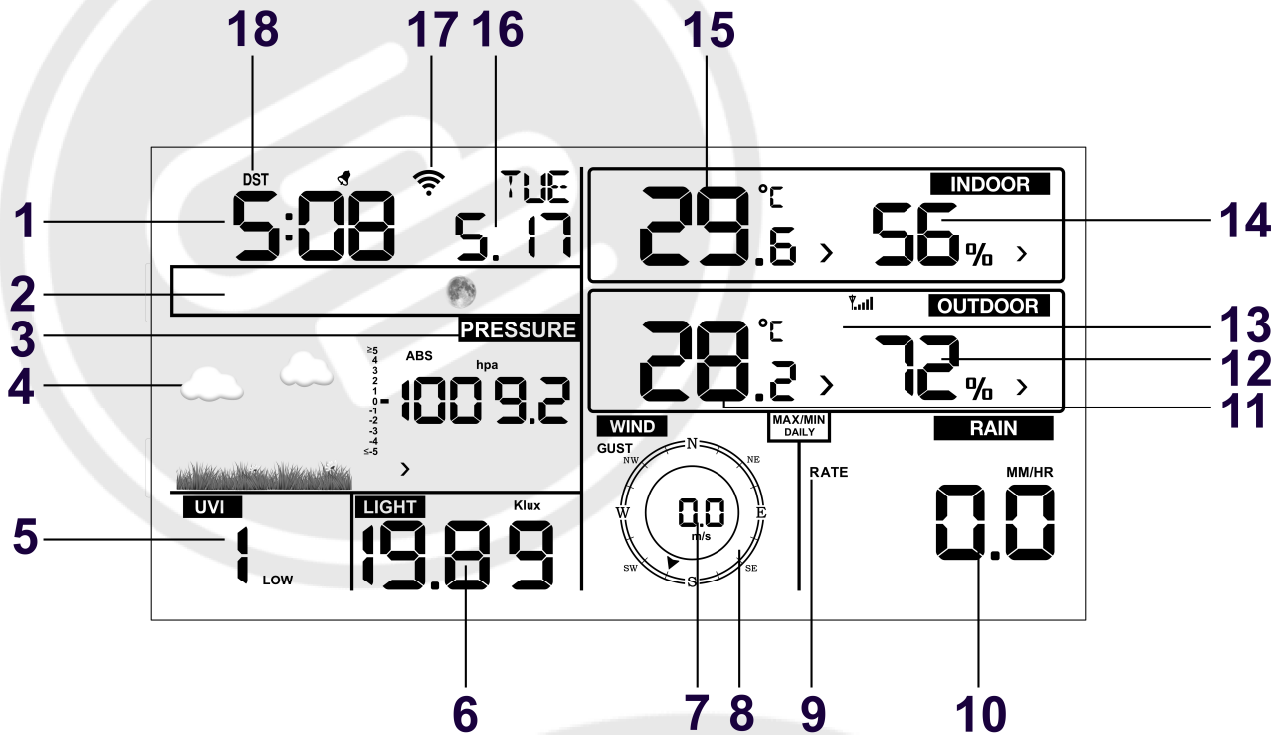


- | | |
|------------------------|--------------------------------|
| 1. Time | 10. Rain fall |
| 2. Moon phase | 11. Outdoor temperature |
| 3. Barometric Pressure | 12. Outdoor humidity |
| 4. Weather forecast | 13. RF icon |
| 5. UV index | 14. Indoor humidity |
| 6. Light | 15. Indoor temperature |
| 7. Wind speed | 16. Date |
| 8. Wind direction | 17. Wi-Fi icon |
| 9. MAX/MIN Daily | 18. DST (daylight saving time) |

6.2. INITIAL DISPLAY CONSOLE SET UP

Connect the power adapter to power up the display console.
The unit will show software version number 2 seconds after power reset.



The unit will turn on all segments of the LCD for 3 seconds after power reset, the unit will start to register the outdoor channel for 3 minutes.

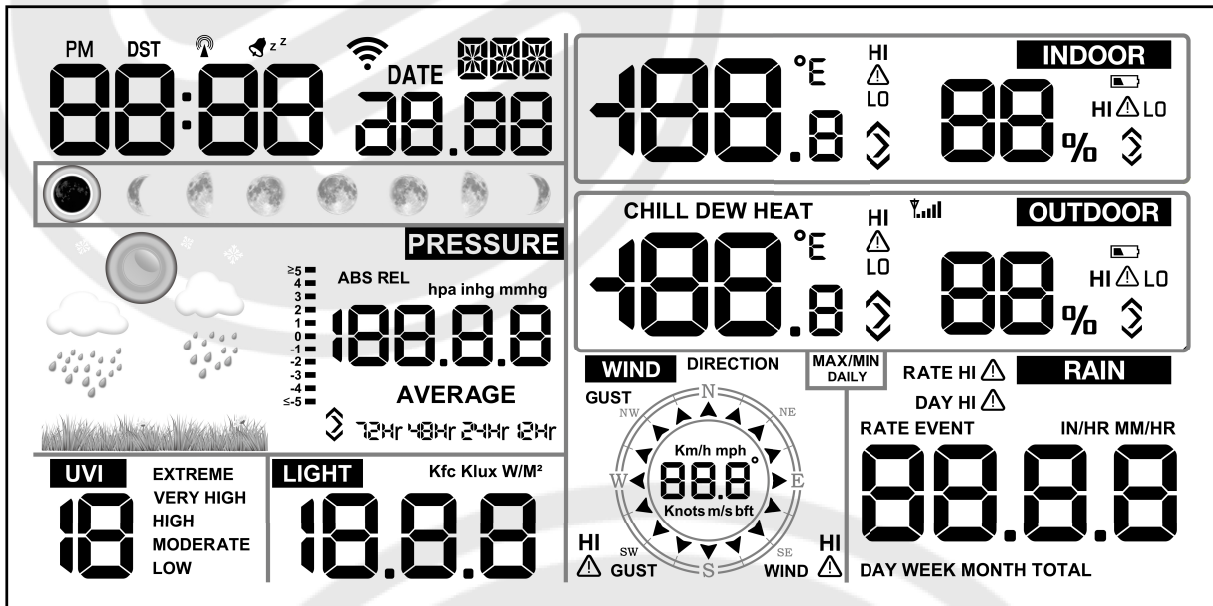

6.3 KEY FUNCTION

The console has eight keys for easy operation



- SET** Hold this key to enter setting mode
- TEMP.** Press this key to view wind Chill, Heat Index, Dew Point Temperature
- RAIN** Press this key to view Rain Rate, event, Rain Day, Rain Week, Rain Month, and Rain total. Press the RAIN key 2s to reset current display rain.
- WIND +** Press this key to view wind/gust and wind direction.
- PRESSURE -** Press this key to view Absolute Pressure average of 12hr, 24hr, 48hr and 72hr. Press and hold 2s this key to view the absolute and relative pressure.
- ALARM** Press this key to view the alarm value of Temperature / Humidity / rain rate / rain day / wind.
- MAX/MIN** Press this key to view the MAX/MIN value of Temperature / Humidity / rain rate / rain day/wind/UVI/LIGHT/Absolute Pressure.
- LIGHT/SNOOZE** Press this key to adjust LCD backlight brightness: HI/MID/OFF. Hold this key to register new transmitter.

Note:

- When power on, press WIND/+ and PRESSURE /- key to reset the weather station and clear all records memory and clears all user settings to default.
- When power on, press TEMP. key to skip receive RF signal.

- In Setting mode, pressing WIND/+ or PRESSURE/- key select the unit or scrolls the value; keeping press and holding WIND/+ or PRESSURE/- key for 2 second will increase/decrease digits in great steps.
- The setting procedure can be exited at any time by either pressing the LIGHT /SNOOZE key or waiting for the 30-second time-out to take effect.

6.4 SETTING MODE

Pressing the SET key for 2 seconds to enter setting model, the basic settings can now be performed in the following order:

6.4.1 BEEP



Press the SET key for 2 seconds to select the beep section, ON/OFF section digits will start flashing, press the WIND/+ or PRESSURE/- key to select ON or OFF.


“BEEP ON” will make the Beep sound on every key press. If you do not want the beep sound to be heard, select “BEEP OFF”

6.4.2 MAX/MIN DAILY



Press the SET key twice to select the MAX/MIN Daily section, ON/OFF section digits will start flashing, press the WIND/+ or PRESSURE/- key to select ON or OFF. (Default is ON, ON: clear at 0:00 every day).

6.4.3 TIME / DATE



- Press the SET key third time to select the 12/24-hour format section (default: 24hr).
- Press the SET key fourth time to select the hour section.
- Press the SET key fifth time to select the minutes section.
- Press the SET key sixth time to select DD-MM or MM-DD format. (Default DD-MM format)
- Press the SET key seventh time to select year.
- Press the SET key eighth tenth time to select month.
- Press the SET key ninth time to select day.

Note: Press the WIND/+ or PRESSURE/-key to set the value.

Note: If user to change minute value, second will auto clear to 0.

Note: While WIFI connection, if the users set upload data to ecowitt.net server, the time will be updated to internet time automatically. Time zone and DST will be automatically synchronized from ecowitt also. If users select to upload to other servers, the time will need to be set manually.

6.4.4 PRESSURE



Press the SET key tenth to select the ABS pressure unit, pressure value and hPa digits will start flashing, press the WIND/+ or PRESSURE/- key to select unit (hPa, inHg, mmHg)

Press the SET key eleventh to select the REL pressure unit, pressure value and hPa digits will start flashing, press the WIND/+ or PRESSURE/- key to select unit (hPa, inHg, mmHg)

1. Viewing Absolute vs. Relative Pressure

To switch between absolute and relative pressure, press and hold the [PRESSURE -] button for two seconds.

Absolute pressure is the measured atmospheric pressure, and is a function of altitude, and to a lesser extent, changes in weather conditions.

Absolute pressure is not corrected to sea-level conditions.

Relative pressure is corrected to sea-level conditions.

2. Rate of Change of Pressure Graph

The rate of change of pressure graphic is shown to the left of the barometric pressure and signifies the difference between the daily average pressure and the 30-day average (in hPa).

3. Viewing Pressure History

Press the [PRESSURE -] button to view the 12-hour, 24-hour, 48 hour and 72 hour pressure average.

4. Relative Pressure Calibration Discussion

To compare pressure conditions from one location to another, meteorologists correct pressure to sea-level conditions. Because the air pressure decreases as you rise in altitude, the sea-level corrected pressure (the pressure your location would be at if located at sea-level) is generally higher than your measured pressure.

Thus, your absolute pressure may read 28,62 inHg (969,2 hPa) at an altitude of 305 m, but the relative pressure is 30,00 inHg (1015,9 hPa).

The standard sea-level pressure is 29,92 inHg (1013,2 hPa). This is the average sea-level pressure around the world. Relative pressure measurements greater than 29,92 inHg (1013,2 hPa) are considered high pressure and relative pressure measurements less than 29,92 inHg (1013,2 hPa) are considered low pressure.

To determine the relative pressure for your location, locate an official reporting station near you (the internet is the best source for real time barometer conditions, such as Weather.com or Wunderground.com), and set your weather station to match the official reporting station.

6.4.5 LIGHT



Press the SET key 14th to select light unit (lux, fc, W/m²; default: W/m²).

6.4.6 TEMPERATURE



Press the SET key 15th time to select in/outdoor temperature unit, degree °C digits will start flashing, press the WIND/+ or PRESSURE/- key to select unit (°C or F; default: °C).
In normal model, press the TEMP. key to view wind Chill, Heat Index, Dew Point Temperature.
Press the TEMP. key for 5 second, will register new transmitter.


Note: every 60 second the unit will measure indoor temperature, indoor humidity and pressure.
If temperature is to lower than minimum range, will display --.-, if it is higher than highest range, will display --.-.

6.4.7 WIND SPEED



Press the SET key 16th to select wind speed unit (km/h, mph, knots, m/s, bft; default: km/h).
In normal mode, press and release the WIND/+ key to view the wind, gust and wind direction.

6.4.8 RAIN



Press the SET key 17th to select rainfall unit (in/mm; default: mm).
In normal mode, press and release the RAIN key to view rain of rate, event, day, week, month and total.
Press the RAIN key for 2 seconds to reset current display rain.

- Reset week rain, will auto reset day rain.
- Reset month rain, will auto reset week and day rain.
- Reset total rain, will auto reset month, week and day rain.

Note:

Rain rate: the last 10 minutes rainfall multiplication 6

Rain event: It start to record the rain event value form the rain falls, the rain event is over and value reset to 0 if last 24-hour rainfall less 1 mm and the last 1 hour no rainfall.

Day: defined by calendar day i.e. 0:00- 24:00 with current date.


Week: defined by calendar week i.e. Sunday – Saturday.

Month: defined by calendar Month i.e. January 1 - January 31.

Total: running total since station was powered on.

Note: the transmitter will send the wind speed, wind direction, rainfall every 16 second.

6.4.9 MOON PHASE



Press the SET key 18th to select Northern or Southern Hemisphere

6.5 ALARM MODE

6.5.1 DISPLAY OF ALARM VALUE

Press and release ALARM key to display high alarm



Press ALARM key again to display low alarm






Note:

- Press RAIN key to select display rate or day rain alarm data.
- Press WIND/+key to select display wind or gust alarm data.
- Press ALARM key third time or press LIGHT /SNOOZE key back to normal mode

6.5.2 ALARM MODE SETTING

Press and hold for 2 seconds ALARM key enter alarm setting mode:
Press the WIND/+ or PRESSURE/- to arm/disarm alerts and adjust alert values.
Press the SET key to confirm & move to the next item.
Press the ALARM key to on/off the alarm

Note: when alert is triggered, the current triggering source  icon for time,  icon for high value and  icon for low value will be flashing, indicating alert is triggered.

Note: press ALARM key third time back to normal mode or press LIGHT /SNOOZE key back to normal mode.

6.5.3 ALARM SETTING ORDER

1. Time alarm setting
2. Indoor high temperature setting
3. Indoor low temperature setting
4. Indoor high humidity setting
5. Indoor low humidity setting
6. Outdoor high temperature setting
7. Outdoor low temperature setting
8. Outdoor high humidity setting
9. Outdoor low humidity setting
10. High wind setting
11. High gust setting
12. Rain rate high setting
13. Rain day high setting

6.6 MAX/MIN MODE

6.6.1 PRESS AND RELEASE MAX/MIN KEY TO DISPLAY MAX DATA



Press TEMP. key to view wind chill, heat index and dew point max.

Press RAIN key to view rain rate, rain day, rain week and rain month max.

Press WIND/+ to view wind and gust max.

Press PRESSURE/- to hold 2 seconds to view pressure absolute and relative max.

Press again to display min data



Press TEMP. key to view wind chill and dew point min.

Press PRESSURE/- to hold 2 seconds to view pressure absolute and relative min.

Note: press and hold 2s MAX/MIN button to reset all max or min. press MAX/MIN key third time back to normal mode or press LIGHT /SNOOZE key back to normal mode.

6.7 CALIBRATION MODE

Hold the TEMP. and MAX/MIN key together for 5 seconds to enter calibration mode.



Press the WIND/+ and PRESSURE/- key to adjust values.

Press the SET key to confirm & move to the next item.

Press the ALARM key to reset any adjusted value.

Press the LIGHT /SNOOZE key at any time to exit.

Calibration Order:

- Indoor temperature offset calibrated (range +/-5°C, default: 0 degrees)
- Indoor humidity offset calibrated (range +/-10%)
- Outdoor temperature offset calibrated (range +/-5°C, default: 0 degrees)
- Outdoor humidity offset calibrated (range +/-10%)
- Absolute pressure offset calibrated (range +/-50hPa)
- Wind direction offset calibrated (adjust by degree)
- Wind speed factor adjust, default 100% (range 50% to 150%)
- Rain factor adjust, default 100% (range 50% to 150%)

6.8 OTHER FEATURES

6.8.1 FACTORY RESET/CLEAR MEMORY

To restore the console to factory default, perform the following steps:

- Remove the power from the console by removing the batteries and disconnecting the AC adapter.
- Apply power by connecting the AC adapter.
- Wait for all of the segments to appear on the screen.
- Press and hold the WIND/+ and PRESSURE/- keys at the same time until the console power up sequence is complete (about 5 seconds).
- Replace the batteries.

6.8.2 REGISTER NEW TRANSMITTER

Press and hold the LIGHT /SNOOZE button for 5 seconds, and the console will re-register the wireless sensor.

6.8.3 BACKLIGHT OPERATION

With AC adaptor.

The backlight can only be continuously on when the AC adapter is permanently on. When the AC adapter is disconnected, the backlight can be temporarily turned on.

Press the LIGHT SNOOZE key to adjust the brightness between High, Low and Off.

Without AC adaptor

To reduce power consumption, the display console will automatically enter sleep mode and will not send data to the Internet if no key is pressed for 15s. Hold the LIGHT /SNOOZE key in sleep mode or plug in the DC adapter wake up equipment.

6.8.4 TENDENCY INDICATORS


Tendency arrows allow you to quickly determine if temperature or pressure are rising and falling in three hours update period, updated every 30 minutes.

Eg.: At 3:00 - compare to 12:00 data; at 3:30 -compare to 12:30 ... etc.

Tendency indicators		Humidity	Temperature	Pressure
^	Rising	Rising > 3%	Rising $\geq 1^{\circ}\text{C}/2^{\circ}\text{F}$	Rising > 1hPa
>	Steady	Change $\leq 3\%$	Change < $1^{\circ}\text{C}/2^{\circ}\text{F}$	Change $\leq 1\text{hPa}$
v	Falling	Falling > 3%	Falling $\geq 1^{\circ}\text{C}/2^{\circ}$	Falling > 1hPa


6.8.5 WIRELESS SIGNAL STRENGTH INDICATOR

The wireless signal strength displays reception quality. If no signal is lost, the signal strength indicator will display 5 bars. If the signal is lost once, four bars will be displayed.

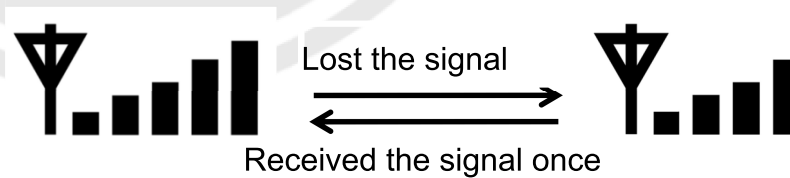

6.8.6 WEATHER FORECAST

There are six color forecast icons use changing atmospheric pressure to predict weather conditions for the next 6-hours. Please allow at least one month for the weather station to learn the barometric pressure over time.

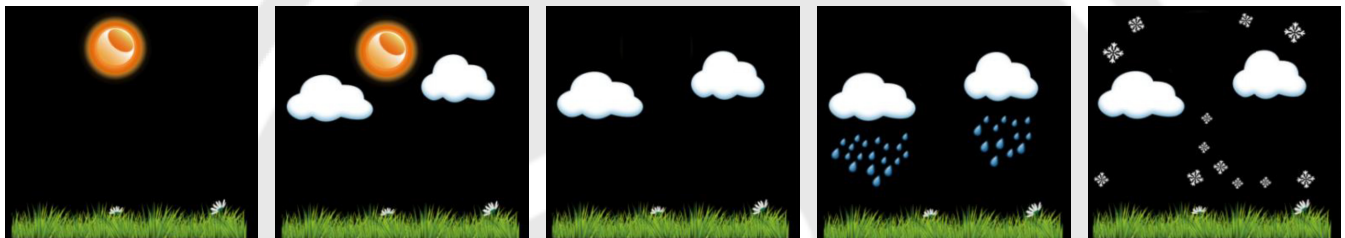


Sunny

Partly sunny


Cloudy

Rainy

Snowy

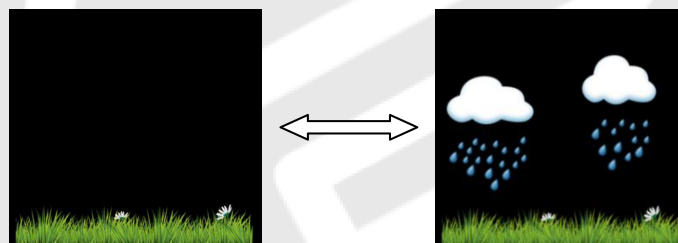

Storm rainy (Blink for 30 minutes at most)

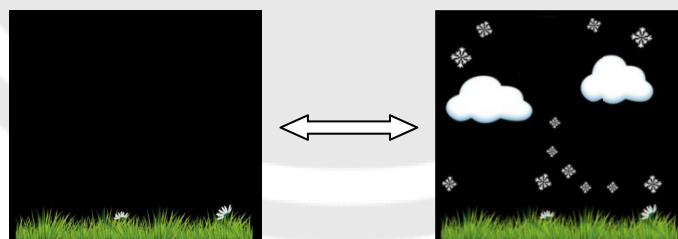

Storm Snowy (Blink for 30 minutes at most)

Note: Snowy icon will appear in place of rainy icon when the outdoor temperature is below 0°C (32°F).

Weather Forecasting Description and Limitations

In general, if the rate of change of pressure increases, the weather is generally improving (sunny to partly cloudy). If the rate of change of pressure decreases, the weather is generally degrading (cloudy, rainy or stormy). If the rate of change is relatively steady, it will read partly cloudy.

The reason the current conditions do not match the forecast icon is because the forecast is a prediction 24-48 hours in advance. In most locations, this prediction is only 70% accurate and it is a good idea to consult the National Weather Service for more accurate weather forecasts. In some locations, this prediction may be less or more accurate. However, it is still an interesting educational tool for learning why the weather changes.

The National Weather Service (and other weather services such as Accuweather and The Weather Channel) have many tools at their disposal to predict weather conditions, including weather radar, weather models, and detailed mapping of ground conditions.


6.8.7 SNOOZE

When time alarm has been triggered, the alarm will sound and alarm icon flash for 120 s. Press SNOOZE/LIGHT key to silence the alarm for 10 minutes and then the alarm will sound again when that time is up. Press any key except SNOOZE/LIGHT key to stop the alarm.

6.8.8. MAC ADDRESS DISPLAY

When the external power adaptor is connected and plugged in press and release the SET button to view MAC address.

For example, the MAC is 12:34:56:AB:CD:EF:

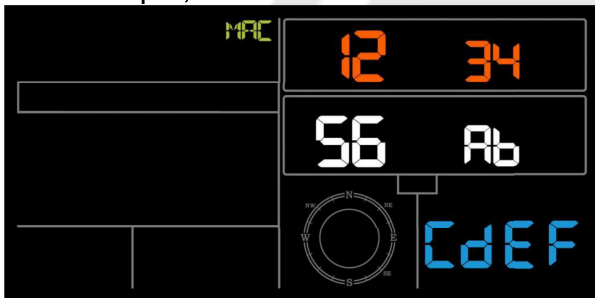

With your obtained MAC address, register your device on the Ecovitt service or customized website.

7. SPECIFICATION

OUTDOOR DATA

Transmission distance in open field:	100 m
Frequency:	868,3 MHz, ERP = -1,83 dBm
Temperature range:	- 40°C ~ 60°C
Accuracy:	± 1°C
Resolution:	0,1°C
Measuring range rel. humidity:	10% ~ 99%
Accuracy:	± 5%
Rain volume display:	0 – 6000 mm (show --- if outside range)
Accuracy:	± 10%
Resolution:	0,254 mm (if rain volume < 1000 mm) 1mm (if rain volume > 1000 mm)
Wind speed:	0-50 m/s (0~100 mph) (show --- if outside range)
Accuracy:	± 1 m/s (wind speed < 5m/s) ± 10% (wind speed > 5m/s)
Light:	0 ~ 200k Lux
Accuracy:	±15%
Measuring interval outdoor sensor:	16 s

INDOOR DATA

Indoor temperature range:	0°C--50°C (show --- if outside range)
Resolution:	0.1°C
Measuring range rel. humidity:	10% ~ 99%
Resolution:	1%
Measuring range air pressure:	700 ~ 1100hPa (20,67-32,5 inHg)
Accuracy:	± 3 hPa
Resolution:	0,1 hPa (0,01 inHg)
Alarm duration:	120 s
Measuring interval indoor data:	60 s

POWER CONSUMPTION

Base station:	5 V DC adaptor (included), Power Consumption: 0,5 Watts (1,25 Watts during WiFi configuration mode) 3 x AAA batteries (not included)
Remote sensor:	2 x AA batteries (not included), The primary power source is the solar panel. The batteries provide backup power when there is limited solar energy

WIFI

Operating Frequency 2412 - 2472 MHz; EIRP = 17,19 dBm.

WE RESERVE THE RIGHT TO CHANGE TECHNICAL SPECIFICATIONS.

8. LIVE INTERNET PUBLISHING

Your console is capable of sending your sensor data to select internet-based weather services. The supported services are shown in the table below

Hosting Service	Website	Description
Ecowitt Weather	https://www.ecowitt.net	Ecowitt is a new weather server that can host a bunch of sensors that other services don't support.
Weather Underground	https://www.wunderground.com	Weather Underground is a free weather hosting service that allows you to send and view your weather station data real-time, view graphs and gauges, import text data for more detailed analysis and use iPhone, iPad and Android applications available at Wunderground.com. Weather Underground is a subsidiary of The Weather Channel and IBM.
Weather Cloud	https://weathercloud.net	Weathercloud is a real-time weather social network formed by observers from around the world.
Weather Observation Website (WOW)	http://wow.metoffice.gov.uk/	WOW is a UK based weather observation website. WOW allows anyone to submit their own weather data, anywhere in the world.
Customized Website		Supports uploading to your customized website, if the website has the same protocol with Wunderground or Ecowitt.

8.1 CONNECTING THE WEATHER STATION CONSOLE TO WIFI

To send weather data to these services you must connect your console to the internet via Wi-Fi. The console can only operate using Wi-Fi when the external power adapter is connected and plugged in!

Note: If you are testing the setup with the outdoor sensor package nearby and indoor, you may want to consider connecting to Wi-Fi, but not yet configuring any of the weather services. The reason is that while indoor the temperatures and humidity recorded by the outdoor sensor, and as reported to the weather service(s) will reflect indoor conditions, and not outdoor conditions. Therefore, they will be incorrect. Furthermore, the rainfall bucket may be tripped during handling, causing rain to register while it may not actually have been raining. One way to prevent this is to follow all instructions, except to use an incorrect password, on purpose! Then, after final outdoor installation, come back and change the password after clearing console history. That will start uploading to the services with a clean slate.

8.1.1 DOWNLOAD MOBILE APPLICATION

Wi-Fi configuration is done using your mobile device, either iOS or Android. Start by downloading the "WS View" application from the Apple App Store or Google Play store, as appropriate for your device.

8.1.2 CONNECT THE CONSOLE TO WI-FI


8.1.2.1 ANDROID USER:

Now activate the application you have downloaded on your mobile device. The following instructions will generally show screen shots for the Android application side by side.


Configure Device



1) Select the device you have from the device list, then press Next

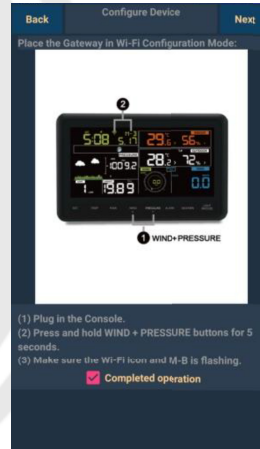


2) Operate as per the information, tick the box to confirm “completed operation”, press Next.

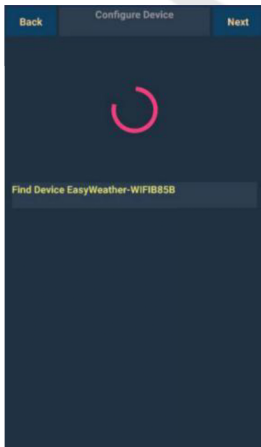


3) Start searching the device. If the device is in your WLAN list., it will jump to the 4) screen shot.

The device named “EasyWeather-WIFI” followed by four characters.

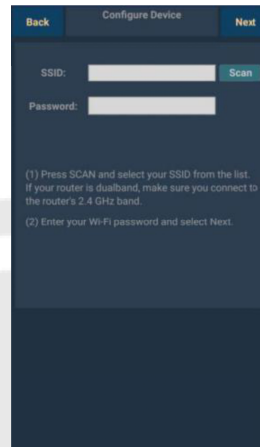

4) Press Scan and select you SSID from the list, then enter your WiFi password and press Next.

If you own a dual band router (2,4 GHz and 5,0 GHz), make sure you connect to the 2,4 GHz band, otherwise it will fail to connect the weather station to WiFi.

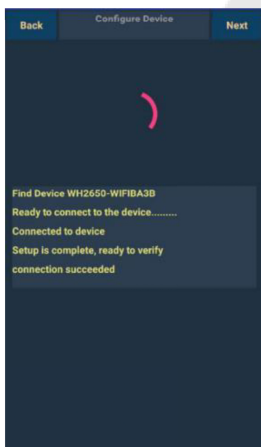

5) Start to connect your phone to the weather station “EasyWeather-WIFI” to your router.


Configure successfully it will jump to “Upload Setting” screen automatically.

Upload Setting


Your console is capable of sending your sensor data to select internet-based weather services: ecowitt.net, Wunderground.com, weathercloud.net, wow.metoffice.gov.uk and Customized Website. User need to register at the select website to get the station ID (or MAC address) and password.

a) Upload your weather data to ecowitt Website


It's recommended to use the Ecowitt Weather server to monitor and record your sensors data. Supports uploading all the sensors data to Ecowitt Weather server. For other weather services, only server- supported data will be uploaded.

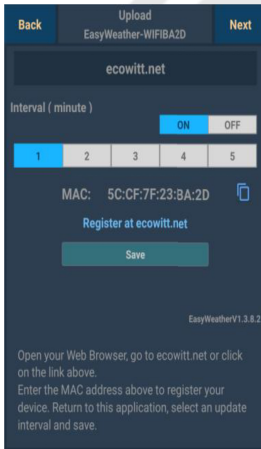

- 1) On the ecowitt.net uploading page, enable the ON button (displayed blue) and set the uploading interval time. Press Save on the page. Copy the MAC address (will be used to add the device on the server later) Press Register at Ecowitt.net to open web browser to activating the Register with Ecowitt.net option.

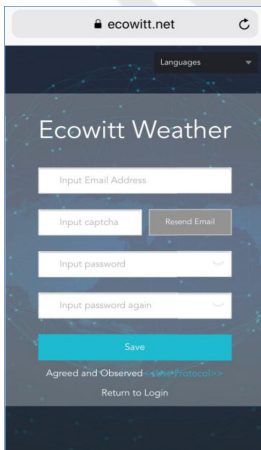

- 2) Finish the registration on the Ecowitt page. If you have account and password, press Return to Login to login the website.

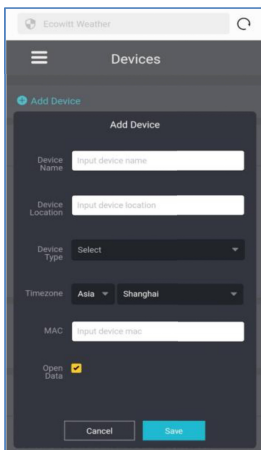


- 3) Press the upper left menu button and select Devices. Press Add Device and input all the information needed. Press Save. If you tick Open data, your weather data can be viewed by other people.

Note: When select device address on map, please wait till the map display before selecting your address.


Note: Please put in the correct time zone to get the correct time. Because the time will be updated to internet time automatically while WIFI connection.

Once registered, select the dashboard to view your data, as shown below:

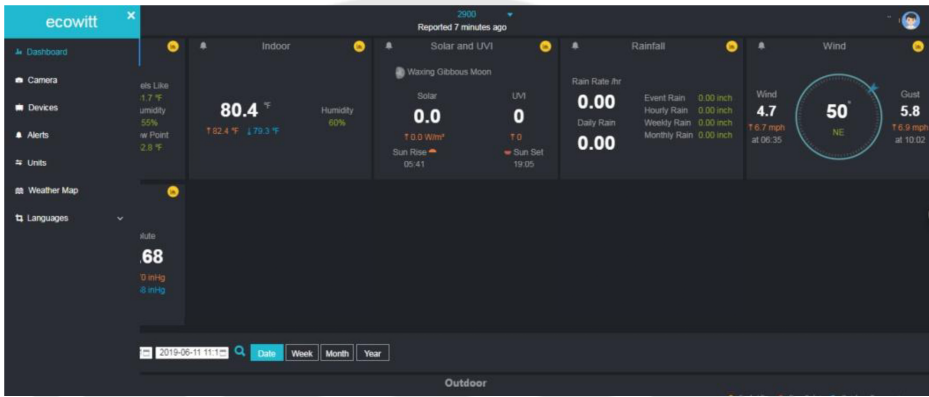


Ecowitt.net is a responsive design and mobile friendly. Simply open your mobile devices web browser, browse to ecowitt.net, and bookmark your dashboard for quick access.


b) Upload your weather data to Wunderground.com

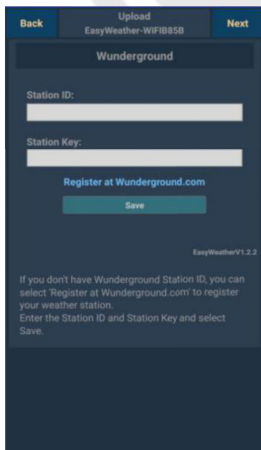


1) On the Wunderground.com uploading page, input Station ID & Station Key, press Save. Your station ID will be added on the WU StationID. Then press Next. Jump to the screen about Upload your weather data to Weathercloud.net
If you don't have Wunderground Station ID and Key, press "Register at Wunderground.com" to activating the Register with Wunderground.com option.

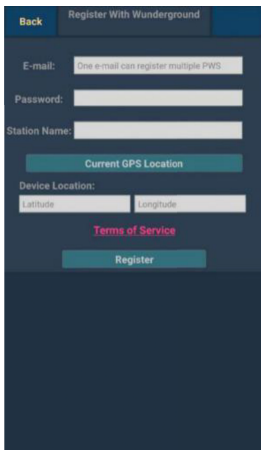

2) Register at Wunderground.com
Enter your valid e-mail address and password to obtain the Station ID & Station Key from Wunderground.com.
Enter the Station Name you want. Press "Current GPS Location" to get the device current location of Latitude and Longitude.
Then press Register.

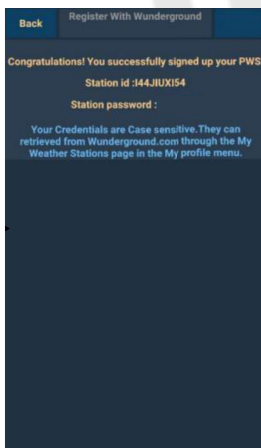


3) If register successfully, you'll receive a Station ID and Station password / key. You will also receive an e-mail about the information of Station ID and Station password / key.
Then press Back to return back Upload screen.

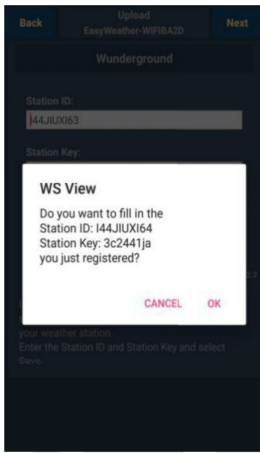


4) Select OK to fill in the Station ID and Station password / key automatically. Press Save Your station ID will be added on the WU StationID. Upload to Wunderground.com Setting finish. Press Next. Jump to the screen about Upload your weather data to Weathercloud.net Press Back if you don't want to upload the data


c) Upload your weather data to Weathercloud.net

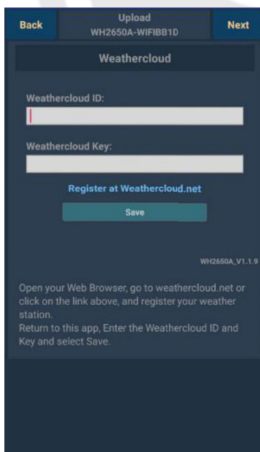

1) Upload your weather data to Weathercloud.net Input Weathercloud ID & Weathercloud Key, press Save.. Then press Next. Jump to the screen about Upload your weather data to Weather Observation Website (WOW) If you don't have Weathercloud ID and Key, press "Register at Weathercloud.net" to open your web browser to activating the Register with Weathercloud.net option.

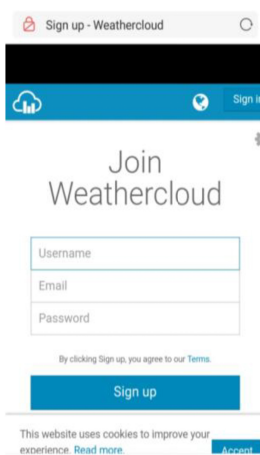


2) Register at Weathercloud.net Visit weathercloud.net and enter a Username, Email and Password to sign up. Respond to the validation email from Weathercloud (it may take a few minutes)

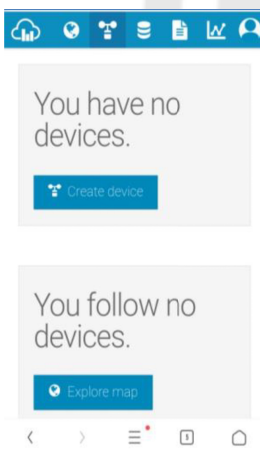


3) You will then be prompted to add a device/ Select "Create device" and enter your station's information: After registering your station, take note of the "Weathercloud ID" and "Key" presented to you. Enter these values in the mobile application.


d) Upload your weather data to WeatherObservationWebsite (WOW)

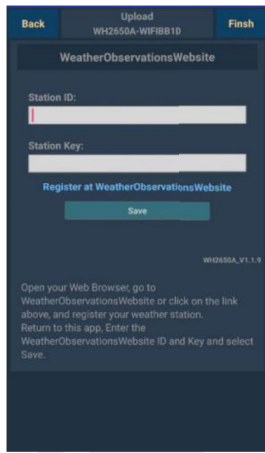

1) Upload your weather data to WOW
Input Weathercloud ID & Weathercloud Key, press Save.
Then press Finish. Jump to the Device List home screen
If you don't have WOW ID and Key, press
"Register at WeatherObservationWeb site" to open your web browser to
activating the Register with WOW option

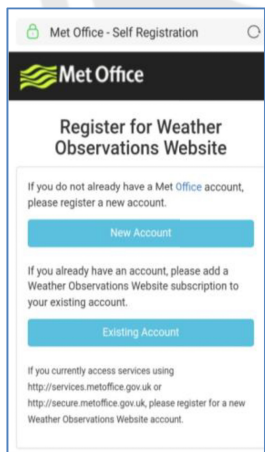

2) Register at WeatherObservationWebsite
Choose create a new account you will be presented with a form to fill out

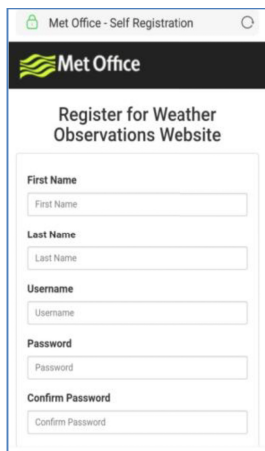

3) The actual form is longer, but all questions should be self-explanatory.
Complete and submit the form. You will shortly receive an email with
instructions on how to login.
Now wait for the email to arrive and click the link in that email to confirm your
email address.


Follow instructions on the screen and login to the site

Once you are logged in you will need to create a new WOW site. "Sites" are the means by which WOW organizes weather data you contribute. Basically, WOW builds a personal web site for your weather station. Associated with the web site is two items you will need to allow uploading of data:


Site ID: This is an arbitrary number that is used to distinguish your site from another. This number appears (in brackets) next to or underneath the name of your site on the site information page, for example: 6a571450-df53-e611-9401-0003ff5987fd

Authentication Key: This is a 6-digit number that is used to ensure data is coming from you and not another user.


Begin setting up a new site by clicking "Enter a Site":



You will be presented with a form where you detail your station's location and a bunch of other settings related to how you wish the site to operate. After you complete the setup, you should see:

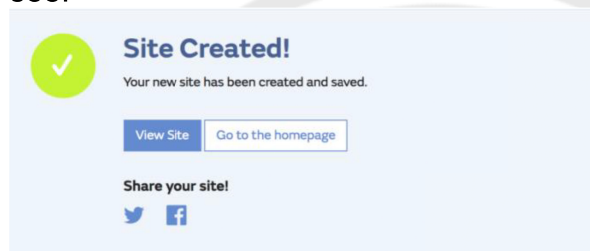

Make sure you are (still) logged in to the WOW site. Login as necessary. Now click on “My Sites” in the navigation bar at the top. If you have only 1 site, you will now be shown its page. If you have multiple, you will have to choose the correct one first. On this page, you will find the site id just below the map:

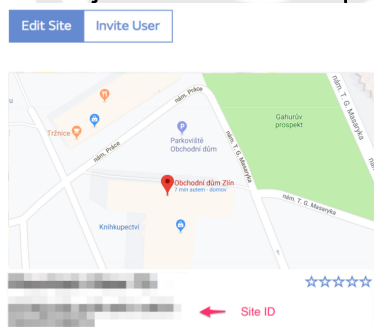

You will also need to establish a unique 6 digits PIN code that you should keep secret. It is the “Authentication Key.” Setup this number by clicking on “Edit Site”) and filling out the with a 6-digit number of your choice:

Authentication Key

You will need both “Site ID” and “Authentication Key” to setup the upload configuration for WOW in the Weather Server.

In your mobile application, navigate to the “Device List” page and tap on the device you want to configure WOW for. You will then be shown the “wunderground.com” configuration. Please ignore and tap “Next” to see the “Weathercloud” configuration. Please press “Next” one more time and you will now be on the screen where you will configure WOW.

On this screen you will fill out “Station ID” with the WOW “Site ID” value, and “Station Key” with the WOW “Authentication Key” you created.


Press “Save” to finalize the configuration.

e) Upload your weather data to Customized Websit

If you want to upload data to your customized website, select Enable button (display blue) and select the protocol type. The website should has the same protocol with Wunderground or Ecowitt. Input all the information needed. Press Save. the email to arrive and click the link in that email to confirm your email address.


8.1.2.2 iOS USER:

Activate the application you have downloaded on your mobile device. The main screen will indicate your station is off-line (because it is not yet connected to Wi-Fi).

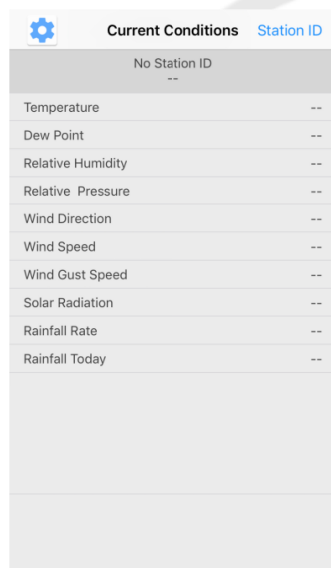


Configure Device

Note: If you own a dual band router (2,4 GHz and 5,0 GHz), make sure you connect to the 2,4 GHz band, otherwise it will fail to connect the weather station to WiFi.

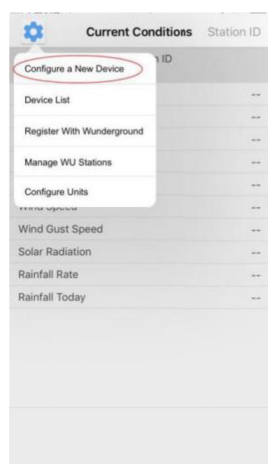


1) Tap on the settings icon and select "Configure a New Device".

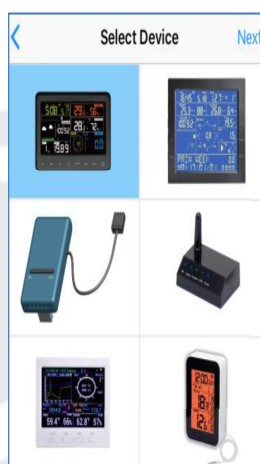

2) Select the device you have from the device list, then press Next.




3) Operate as per the information, tick the box to confirm "completed operation", press Next.

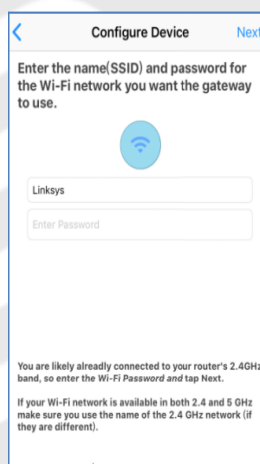




5)

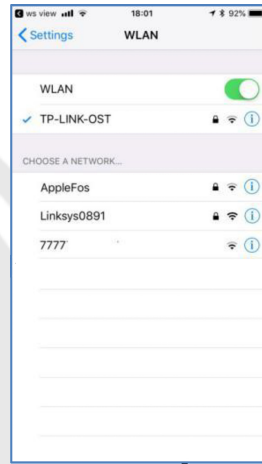

6) Select your WiFi network you want and return to WS Wiew App.

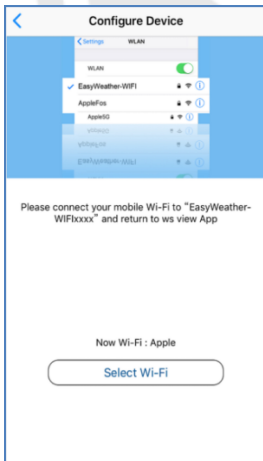


7) Press button “Select WiFi” to go to Wi-Fi Setting



8) Select device WiFi. The device named “EasyWeather-WIFxxxxl” and return to WS View App



9) Connection success, it will jump to “Upload Setting” screen automatically.

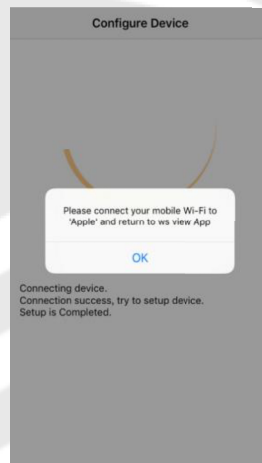

10) It may have chance to happen that it cannot return back the same WiFi network which you selected on step 4) The window “Please connect your mobile Wi-Fi to xxxx (WiFi Network name) and return to WS View App” will pop up. Press OK to continue.

Upload Setting

Your console is capable of sending your sensor data to select internet-based weather services: Wunderground.com, Weathercloud.net and, wow.metoffice.gov.uk. User need to register at the select website to get the station ID and password.


a) Upload your weather data to Ecowitt Website



1) On the ecowitt.net uploading page, enable the ON button (displayed blue) and set the uploading interval time. Press Save on the page. Copy the MAC address (will be used to add the device on the server later) Press Register at Ecowitt.net to open web browser to activating the Register with Ecowitt.net option




2) Finish the registration on the Ecowitt page. If you have account and password, press Return to Login to login the website

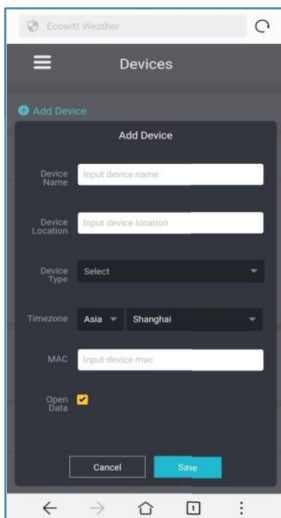


3) Press the upper left menu button and select Devices. Press Add Device and input all the information needed. Press Save. If you tick Open data, your weather data can be viewed by other people.


b) Upload your weather data to Wunderground.com

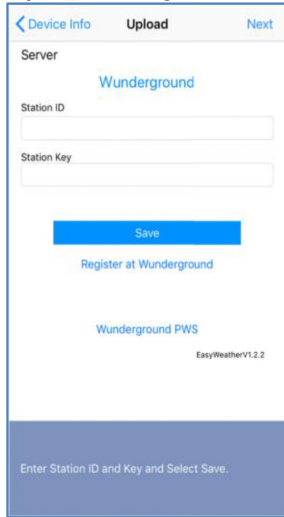

1) Upload your weather data to Wunderground.com
Input Station ID & Station Key, press Save. Your station ID will be added on the WU StationID.
Then press Next. Jump to the screen about Upload your weather data to Weathercloud.net
If you don't have Wunderground Station ID and Key, press "Register at Wunderground.com" to activating the Register with Wunderground option

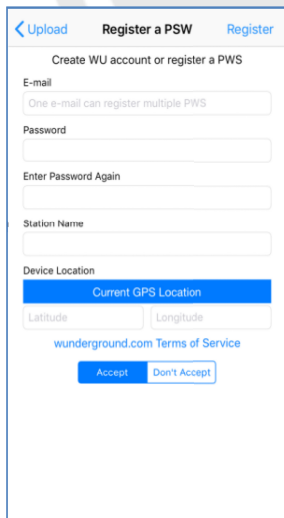

2) Register at Wunderground.com
Enter your valid e-mail address and password to obtain the Station ID & Station Key from Wunderground.com.
Enter the Station Name you want. Press "Current GPS Location" to get the device current location of Latitude and Longitude.
Then press Register

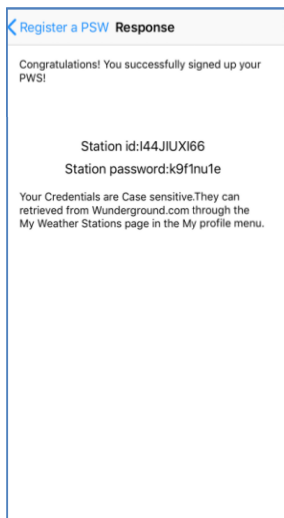


3) If register successfully, you'll receive a Station ID and Station password / key.. You will also receive an e-mail about the information of Station ID and Station password / key.
Then return to Upload Wunderground screen to input Station ID & Station Key.

c) Upload your weather data to Weathercloud.net

Input Weathercloud ID & Weathercloud Key, press Save. Then press Next. Jump to the screen about Upload your weather data to WeatherObservation Website (WOW).

If you don't have Weathercloud ID and Key, press "Register at Weathercloud.net" to open your web browser to activating the Register with Weathercloud.net option. Please refer 8.1.2.1 Register at Weathercloud.net. The operation is same.

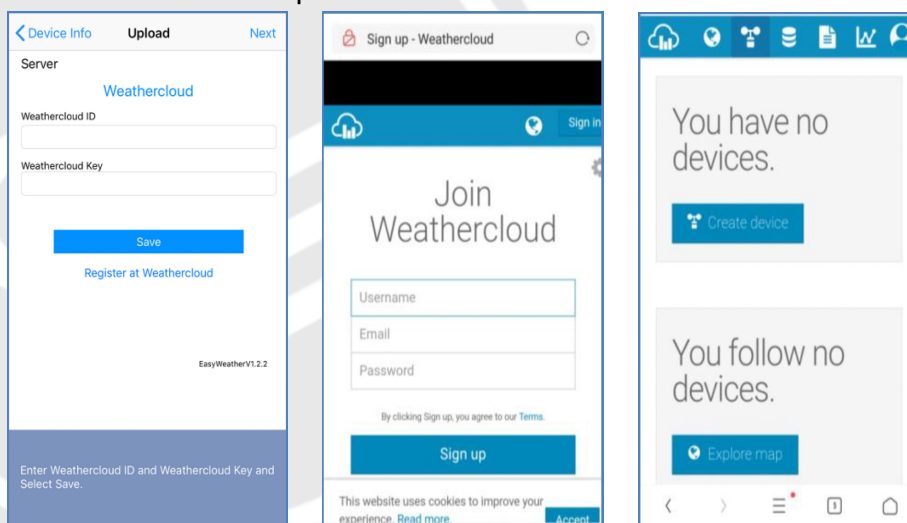


d) Upload your weather data to WeatherObservationWebsite (WOW)


Input Weathercloud ID & Weathercloud Key, press Save. Then press Finish. Jump to the Device List home screen.

If you don't have WOW ID and Key, press "Register at WeatherObservationWebsite" to open your web browser to activating the Register with WOW option.

Please refer 8.1.2.1 Register at WeatherObservationWebsite. The operation is same.

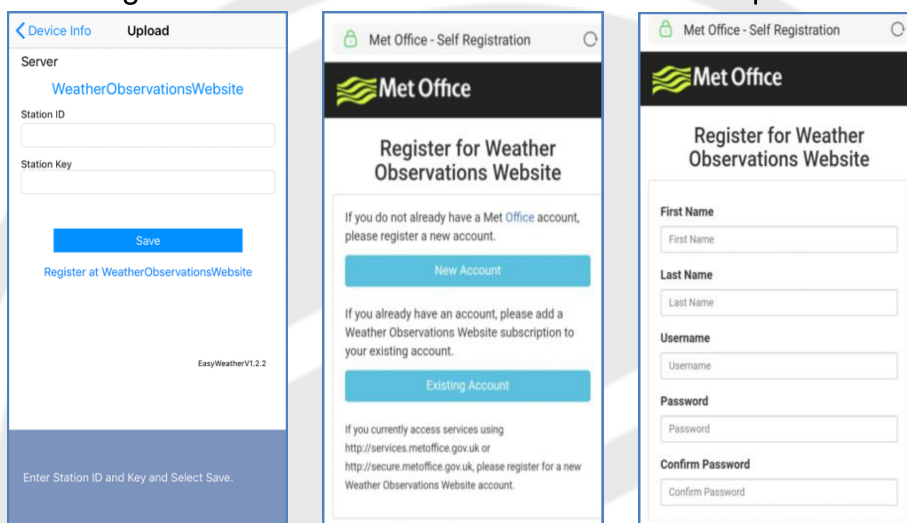

e) Upload your weather data to Customized Website

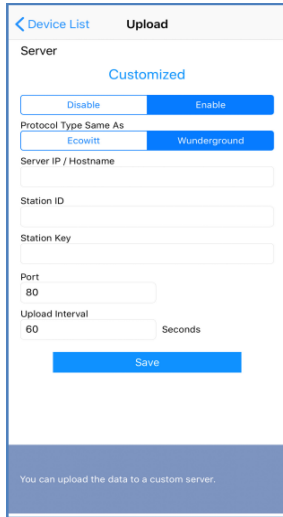


If you want to upload data to your customized website, select Enable button (display blue) and select the protocol type. The website should has the same protocol with Wunderground or Ecovitt. Input all the information needed. Press Save.


8.2 MOBILE APPLICATION – DEVICE LIST

You are able to see your console through the “Device List” menu option: Tapping on your console’s entry in the device list will bring you to the page where you can change WU registration information. If you want to stop your console upload data to Wunderground, delete your Station ID and select “Save”.

Mobile application – Device List (Android)

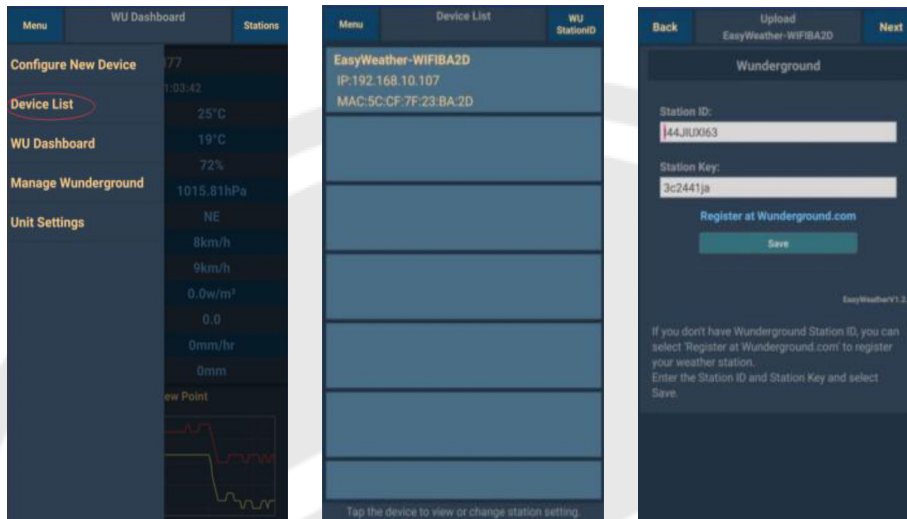

Mobile application – Device List (iOS)

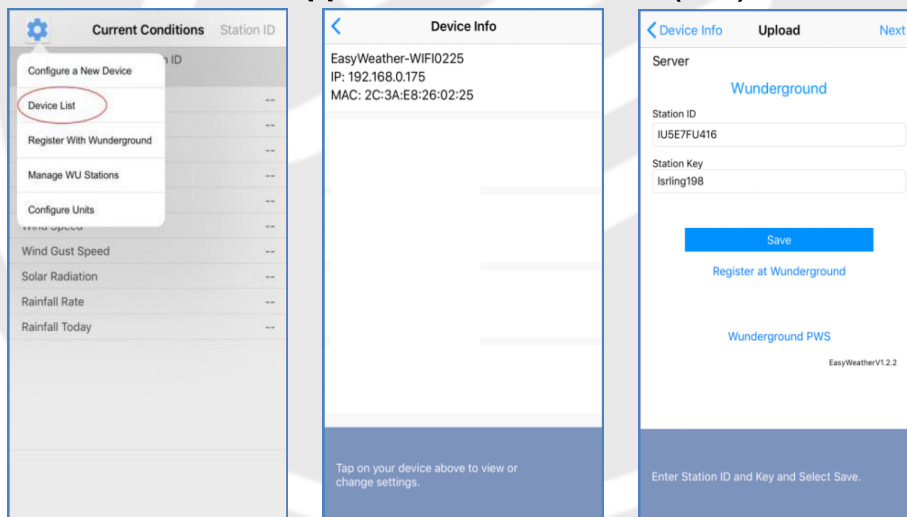


8.3 MOBILE APPLICATION – CHECK WU WEATHER DATA AND GRAPH


In the mobile application tap Menu choose WU Dashboard and you will be presented with a page listing current conditions for that station.

If you have added multiple WU IDs, tap on the WU Station ID to switch to view data from other IDs.

Mobile application – WU Daseboard (Android)

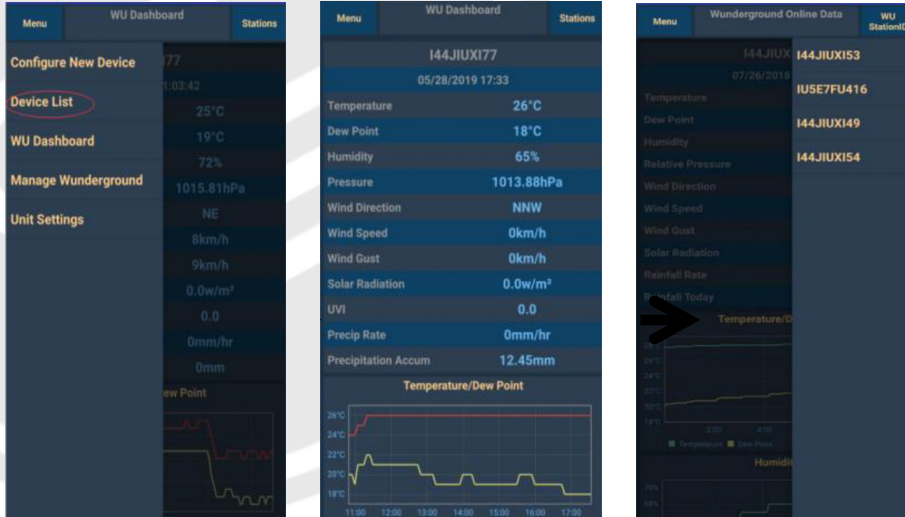

Mobile application – WU Daseboard (iOS)

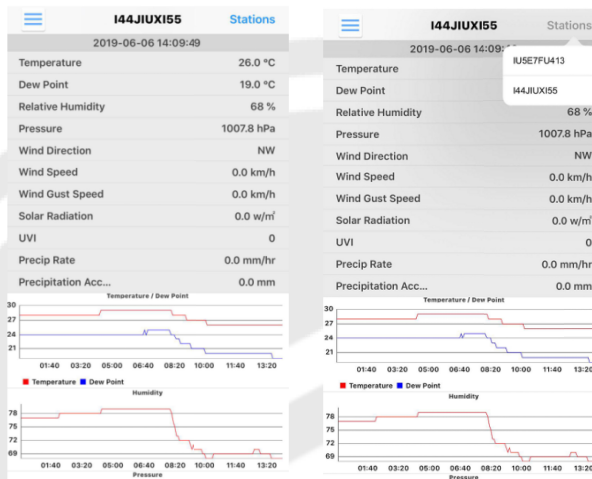


8.4 MOBILE APPLICATION – REMOVE OR ADD WU ID


If you have previously registered your console for use with wunderground.com and wish to remove this device data display from App, use the “Manage WU Station” menu option after tapping on the settings icon, select “Delete” your console from the list and confirm you wish to delete the station. The Station ID will delete from WU Station ID list and will not have the data information on the APP. But the data will upload to Wunderground.com as usual.

If you want to add a new weather station to view its data on APP, and this device have registered in Wunderground.com, select “Add WU Station ID” and input the WU station ID of this new device.

Mobile application –Remove or Add WU ID (Android)

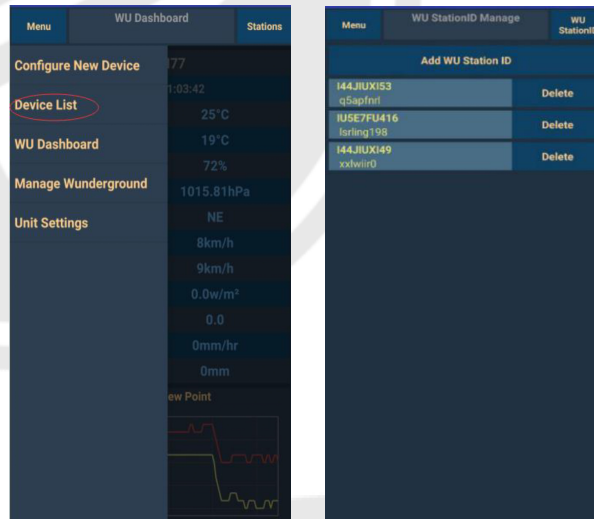


Mobile application –Remove or Add WU ID (iOS)

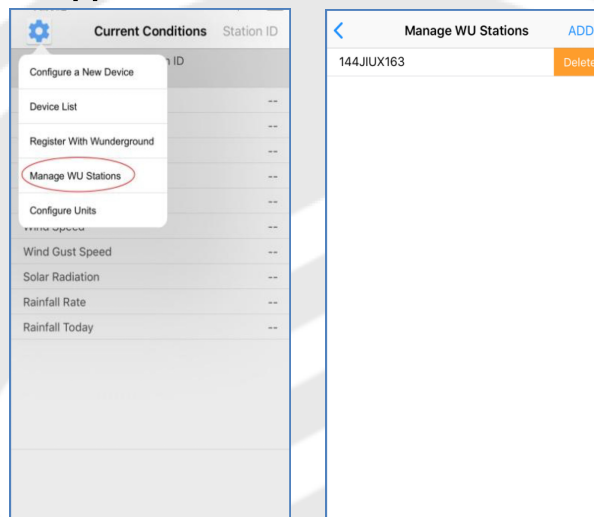


8.5 MOBILE APPLICATION – SET UNITS

You may want to change the units in which sensor values are reported. To do so, click on the “Configure Units” menu after tapping on the settings icon. Next, tap on the sensor type you wish to change the reporting units for and set the units as desired.

Mobile application – Change units (Android)

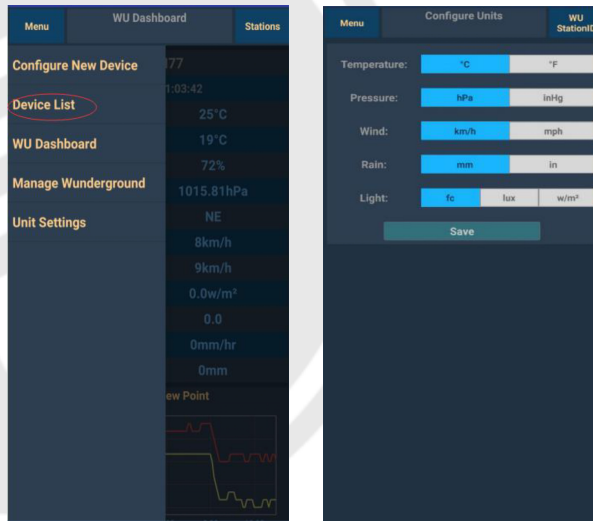


Mobile application – Change units (iOs)

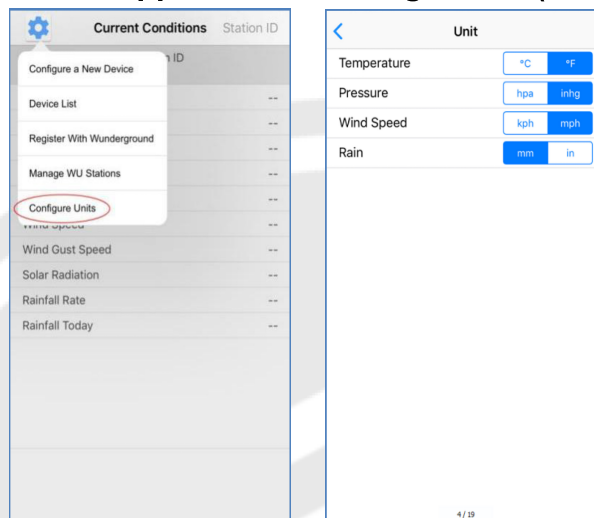



9. REGISTERING WEATHERUNDERGROUND.COM THROUGH THE PC OR MAC

If you have not already done setup for wunderground.com during the Wi-Fi setup, you can do so later. Perform the following steps:


- Visit Wunderground.com and click Join as the right top arrow indicates and select the Sign up for free option.

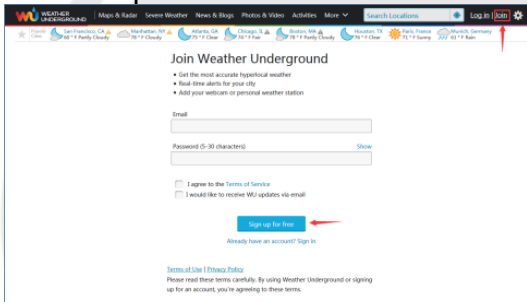

- Click More and select Add Weather Station to register your station.

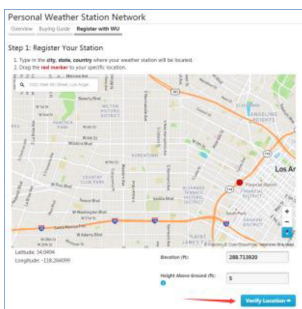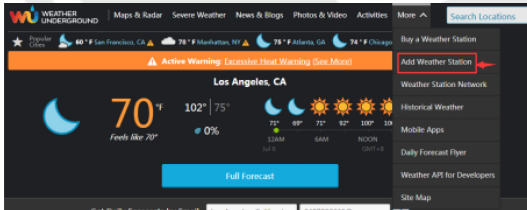

- Clicks verify location and fill out the form. After submitting the form, you will see the following:

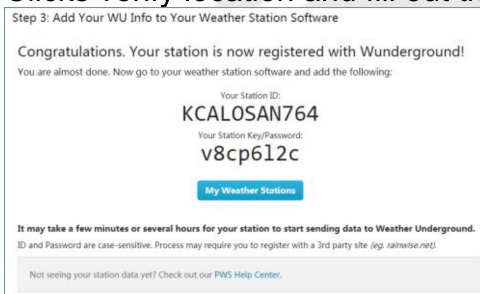

Note: Your station ID will have the form: KSSCCCC####, where K is for USA station (I for international), SS is your state, CCCC is your city and #### is the station number in that city.

In the example above, KAZPHOEN424 is in the USA (K), State of Arizona (AZ), City of Phoenix (PHOEN) and #424.

Viewing your Data on Wunderground.com

You can also observe your weather station's data by using the wunderground.com web site. You will use a URL like this one, where your station ID replaces the text "STATIONID":

<http://www.wunderground.com/personal-weather-station/dashboard?ID=STATIONID>

It will show a page such as this, where you can look at today's data and historical data as well:



There are also some very useful mobile apps. The URLs provided here go to the Web version of the application pages. You can also find them directly from the iOS or Google Play stores:

- **WunderStation:** iPad application for viewing your station's data and graphs



- **Storm - Weather radar & maps:** iPad and iPhone application for viewing radar images, animated wind, cloud coverage and detailed forecast, and PWS station data



- **Weather Underground: Forecast:** iOS and Android application for forecasts



- **PWS Weather Station Monitor:** View weather conditions in your neighborhood, or even right in your own backyard. Connects to wunderground.com




10. MAINTENANCE

- Clean the rain gauge once every 3 months. Rotate the funnel counterclockwise and lift to expose the rain gauge mechanism, and clean with a damp cloth. Remove any dirt, debris and insects. If bug infestation is an issue, spray the array lightly with insecticide.
- Clean the solar radiation sensor and solar panel every 3 months with damp cloth.
- Replace batteries every 1-2 years. If left in too long, the batteries may leak due to environmental challenges. In harsh environments, inspect the batteries every 3 months (when cleaning the solar panel).
- When replacing the batteries, apply a corrosion preventive compound on the battery terminals, available at Amazon and most hardware stores.
- In snowy environments, spray the top of the weather station with anti-icing silicon spray to prevent snow build up.

11. TROUBLESHOOTING GUIDE

Problem	Solution
Outdoor sensor array does not communicate to the display console	<p>The sensor array may have initiated properly and the data is registered by the console as invalid, and the console must be reset. Press the reset button as described in Section 5.2.</p> <p>With an open-ended paperclip, press the reset button for 3 seconds to completely discharge the voltage.</p> <p>Take out the batteries and wait one minute, while covering the solar panel to drain the voltage.</p> <p>Put batteries back in and resync the console with the sensor array about 3 m away.</p> <p>The LED next to the battery compartment will flash every 16 seconds. If the LED is not flashing every 16 seconds...</p> <p>Replace the batteries in the outside sensor array.</p> <p>If the batteries were recently replaced, check the polarity. If the sensor is flashing every 16 seconds, proceed to the next step.</p> <p>There may be a temporary loss of communication due to reception loss related to interference or other location factors,</p> <p>or the batteries may have been changed in the sensor array and the console has not been reset. The solution may be as simple as powering down and up the console (remove AC power and batteries, wait 10 seconds, and reinsert AC power and batteries).</p>
Temperature sensor reads too high in the daytime.	<p>Make certain that the sensor array is not too close to heat generating sources or structures, such as buildings, pavement, walls or air conditioning units.</p> <p>Use the calibration feature to offset installation issues related to radiant heat sources. Reference Section 6.7.</p>

Problem	Solution
Relative pressure does not agree with official reporting station	An unstable mounting solution (sway in the mounting pole) may result in the tipping bucket incorrectly incrementing rainfall. Make sure you have a stable, level mounting solution.
Rain gauge reports rain when it is not raining	An unstable mounting solution (sway in the mounting pole) may result in the tipping bucket incorrectly incrementing rainfall. Make sure you have a stable, level mounting solution.
Data not reporting to Wunderground.com	<p>Confirm your password or key is correct. It is the password you registered on Wunderground.com. Your Wunderground.com password cannot begin with a non-alphanumeric character (a limitation of Wunderground.com, not the station). Example, \$oewkrf is not a valid password, but oewkrf\$ is valid.</p> <p>Confirm your station ID is correct. The station ID is all caps, and the most common issue is substituting an O for a 0 (or vice versa). Example, KAZPHOEN11, not KAZPH0EN11</p> <p>Make sure the date and time is correct on the console. If incorrect, you may be reporting old data, not real time data.</p> <p>Make sure your time zone is set properly. If incorrect, you may be reporting old data, not real time data.</p> <p>Check your router firewall settings. The console sends data via Port 80.</p>
No WiFi connection	<p>Check for WiFi symbol on the display. If wireless connectivity is successful, the WiFi icon  will be displayed in the time field.</p> <p>Make sure your modem WiFi settings are correct (network name, and password).</p> <p>Make sure the console is plugged into AC power. The console will not connect to WiFi when powered by batteries only.</p> <p>The console only supports and connects to 2,4 GHz routers. If you own a 5 GHz router, and it is a dual band router, you will need to disable the 5 GHz band, and enable the 2.4 GHz band.</p> <p>The console does not support guest networks.</p>



WARNING: DO NOT USE THIS PRODUCT NEAR WATER, IN WET AREAS TO AVOID FIRE OR INJURY OF ELECTRIC CURRENT. ALWAYS TURN OFF THE PRODUCT WHEN YOU DON'T USE IT OR BEFORE A REVISION. THERE AREN'T ANY PARTS IN THIS APPLIANCE WHICH ARE REPARABLE BY CONSUMER. ALWAYS APPEAL TO A QUALIFIED AUTHORIZED SERVICE. THE PRODUCT IS UNDER A DANGEROUS TENTION.



TO AVOID DANGER OF SUFFOCATION, KEEP THE PLASTIC BAG AWAY FROM BABIES AND CHILDREN. DO NOT USE THIS BAG IN CRIBS, BEDS, CARRIAGES OR PLAYPENS. THIS BAG IS NOT A TOY.

Disposal of old Electrical & Electronic Equipment (Applicable in the European Union and other European countries with separate collection systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.

Hereby, ETA a.s. declares that the radio equipment type ME3900 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
http://www.gogen.cz/declaration_of_conformity



GoGEN